

**OPTIONAL PRESS WHEEL SCRAPER WITH OR WITHOUT FVC BRACKET  
AND GAUGE WHEEL SCRAPER MOUNTING INSTRUCTIONS**

IH 800/900/950/955/ and 1200 Planters  
(Read Instructions Completely before Beginning Installation)

**Before working on your planter or drill**

**DANGER:** when storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.



**Press Wheel Mounting Instructions**

Before you begin, verify the “package contents” to ensure all items are included.

- Step #1:** bolt the scraper bracket to the Furrow V Closer using the 4 - 3/8" x 1" bolts provided in the kit (**fig. (a)**).
- Step #2:** bolt the plastic scraper to the back side of the mounting bracket with the 5/16" bolts provided in the kit. Adjust the scraper to wipe the mud off of the press wheel. Tighten the bolts (**fig. (b)**).

Press Wheel Package Contents (per single row)	
Item	Quantity
Metal Bracket . . . . .	1
3/8" x 1" bolts . . . . .	4
Lock Nuts . . . . .	4
Plastic Scraper . . . . .	1
5/16" bolts . . . . .	2
Washer . . . . .	1
5/16 flat washer . . . . .	1
Nuts . . . . .	2
Instruction Sheet . . . . .	1

Press Wheel Package Contents Without FVC (per single row)	
Item	Quantity
Mtg. Bracket . . . . .	1
Plastic Scraper . . . . .	1
1/2"x1" bolt . . . . .	2
1/2" lock washer . . . . .	2
1/2" nuts . . . . .	2
5/16x1 bolts . . . . .	2
5/16 flat washers . . . . .	2
5/16 nuts . . . . .	2
Instruction Sheet . . . . .	1

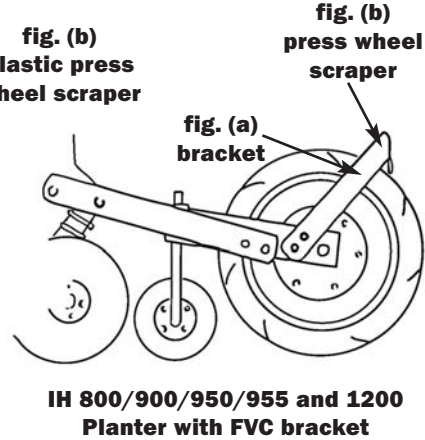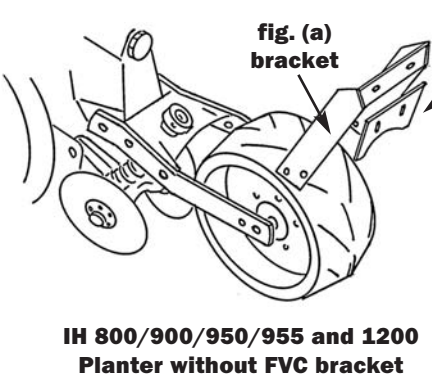

**Gauge Wheel Mounting Instructions**

Before you begin, verify the “package contents” to ensure all items are included.

- Step #1:** here are right and left hand scraper brackets. Facing the back of the planter determines which is right and left.
- Step #2:** see **fig. (c)** to bolt plastic scrapers to the brackets. Don't tighten too much so scraper can be positioned to fit tire contour. You want about 1/4" of gap between metal arm over the tire. Fasten scraper to bracket using the 1/4" carriage bolts and whiz nuts.
- Step #3:** then clamp scraper to arm ahead of the bearing in the wheel as in **fig. (d)**. Try to center two holes in the bracket with the gauge wheel arm as shown in **fig. (e)**.
- Step #4:** next drill 2-3/8" holes in gauge wheel arm so bracket can be bolted to arm. After bracket is bolted to arm with 2- 3/8" bolts, lock washers and nuts, tighten plastic scraper into place so wheel turns without binding on scraper.
- Step #5:** reinstall gauge arms back on the planter.  
**Suggestion:** Put bolt thru metal arm followed by scraper and whiz nut. THINK metal to metal so bolt doesn't wear a hole in plastic scraper.

Gauge Wheel Package Contents (per single row)	
Item	Quantity
Metal Bracket . . . . .	1
3/8" x 1" bolts . . . . .	2
Lock Washer . . . . .	2
Nuts . . . . .	2
Plastic Scraper . . . . .	1
1/4" X 1" Carriage Bolts . . . . .	2
Whiz nuts . . . . .	2
Instruction Sheet . . . . .	1

