

REBOUNDER MOUNTING INSTRUCTIONS

Esch Drills

- !!** • **DANGER:** When storing or working on the drill always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments. **!!**
- **WARNING:** Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

DOE Package Contents Rebounder for Esch Drills	
Qty	Item
1	5-hole Rebounder
2	1/4" x 1" Bolt
2	1/4" Whiz Nut
DEMB Package Contents Rebounder Mounting Bracket for Esch Drills	
Qty	Item
1	Mounting Bracket
1	3/8" x 1-1/4" Carriage Bolt
1	3/8" Nylon Lock Nut

Before you begin, verify all "package contents" items. Qty is per single row.



NOTE: If applying liquids in furrow with the Rebounder, attach either Y-Not Split It, Hose Holder, or Straight Shot kit by following kit directions.

! INSTALL KIT BEFORE INSTALLING REBOUNDER TO PLANTER UNIT.
See kit instructions.

STEP #1:

Remove one disc.

STEP #2:


The Rebounder attaches to the under side of the mounting bracket.

From the top side of the bracket, push the 1/4" x 1" carriage bolts in through the 2nd and 4th (bottom) holes from the top of the mounting bracket.

If using the Straight Shot kit, the L-bracket can be installed under the top bolt.

The bolts should go through the two bottom holes (4th and 5th holes from the top) of the Rebounder.

Secure in place with the two 1/4" whiz nuts.

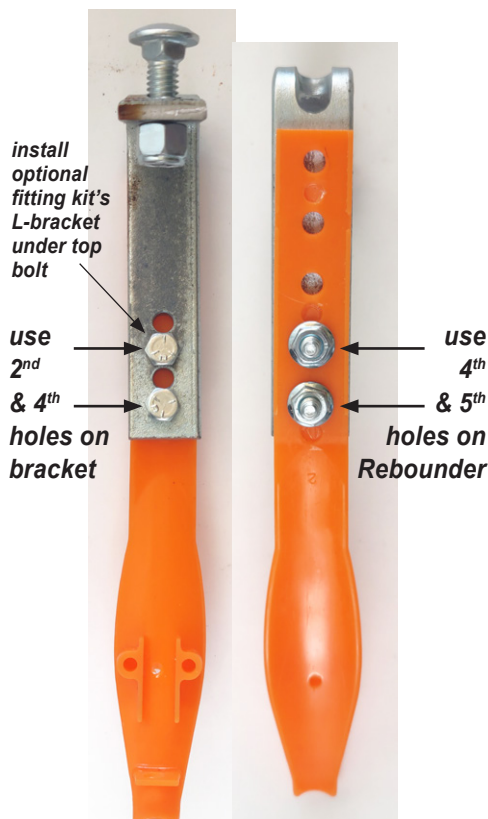

STEP #3:

Hold the scraper in place as you install the mounting bracket under it with the 3/8" x 1-1/4" carriage bolt.

Secure with 3/8" Nylon lock nut.

REBOUNDER MOUNTING INSTRUCTIONS

HELPFUL HINTS FOR MOUNTING THE REBOUNDER™ ON DRILLS

(Read Instructions Completely before Beginning Installation)

Before working on your planter or drill

DANGER: When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder.

WARNING: Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

Helpful Hints

Step #1: use a farm jack on the press wheel to raise up the drill unit 3-4" before you mount the first row.

IMPORTANT: have press wheel adjusting handle of knob, in the position you would normally run in the field (see **fig (a)**).

Step #2: slide a board or piece of flat iron under the double disc openers and back under the press wheel tire. The board or flat iron represents the bottom of the seed V.

Step #3: now you can bolt the Rebounder to the bracket on the drill. Using the 1/4" bolts attach the Rebounder to the bracket on the drill.

Step #4: variances in the disc blade size will occur among individual drills as well as within any single drill. Measure discs behind the tire track rows. If they are worn more than other rows this process may need to be used to set these rows also.

Step #5: if replacing Rebounders on previously installed brackets, simply remove the old Rebounder without removing the disc blade. Using a small bar magnet or a long handled magnet, place the bolt on the magnet and slide it up between the discs and into the holes of the bracket and the Rebounder. This allows you to come in behind with a wrench or socket to install and tighten the nuts.

