

REBOUNDER MOUNTING INSTRUCTIONS

Case IH SDX 30 Drill

Before working on your planter or drill

DANGER: When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the attachments.

PLEASE: Read instructions completely and verify all package contents before beginning installation

RUNNING FERTILIZER

#1: If applying liquids in furrow with the Rebounder, attach either Y-Not Split It, Hose Holder, or Straight Shot kit by following kit directions.

INSTALL KIT BEFORE INSTALLING REBOUNDER TO PLANTER UNIT. SEE KIT INSTRUCTIONS.

DOSDX Rebounder

Package Contents (per single row)

Item	Quantity
7-Hole Rebounder	1
Coated Tube Clamp	1
1/4" Flat Washer	2
1/4" Whiz Nut	2
Instruction Sheet	1

MOUNTING THE REBOUNDER

#2: Tube Clamp & Washers: Use as needed on bottom bolt of the SDX seed tube, under the Rebounder, in order to achieve the proper bend. The Rebounder should run at a 60° to 65° angle from the bottom of the seed trench. (Without the tube clamp and washers, the Rebounder will sit at a nearly 90° angle.)



Place the tube clamp over the bolt with the flat edge towards the seed tube and the round coated edge at the bottom.



Add the washers as needed over the tube




#3: Rebounder: Use 2nd & 4th holes from the spoon or bottom of the Rebounder to mount it onto the existing bolts of the SDX seed tube.

Adjust usage of tube clamp and washers for the proper bend on the Rebounder, a 60° to 65° angle from the bottom of the seed trench.



#4: Whiz Nuts: Secure the Rebounder in place with the 1/4" whiz nuts. Tighten nuts once the desired Rebounder angle is achieved.

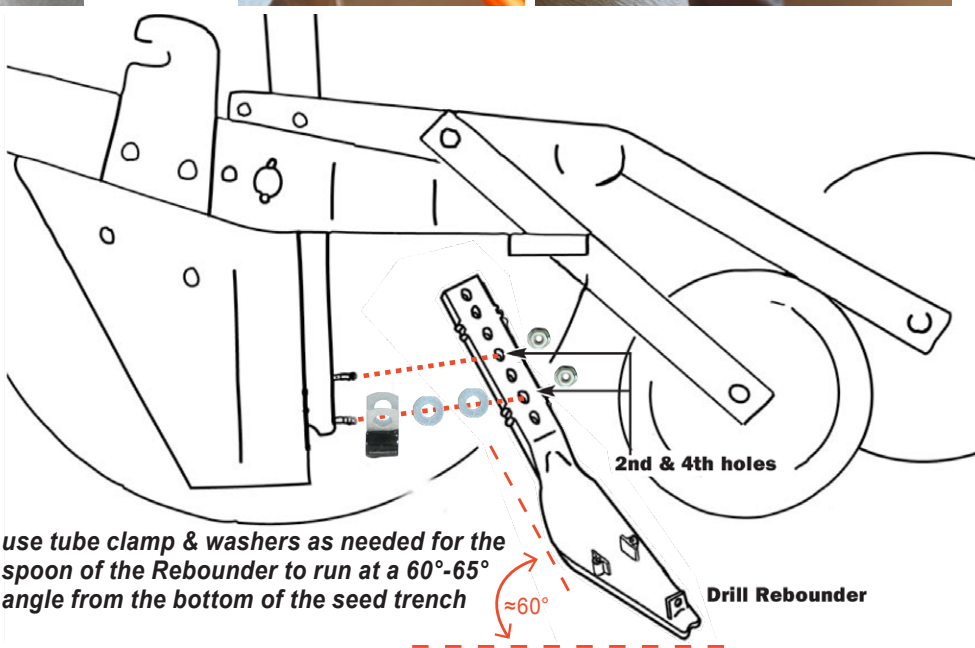

use tube clamp & washers as needed for the spoon of the Rebounder to run at a 60°-65° angle from the bottom of the seed trench

VIDEO

https://youtu.be/66i0H3Ztg_Q

REBOUNDER MOUNTING INSTRUCTIONS

Case IH SDX 30 Drill

HELPFUL HINTS FOR MOUNTING THE REBOUNDER™ ON DRILLS

(Read Instructions Completely before Beginning Installation)

Before working on your planter or drill

DANGER: When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder.

WARNING: Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

Helpful Hints

Step #1: use a farm jack on the press wheel to raise up the drill unit 3-4" before you mount the first row.

IMPORTANT: have press wheel adjusting handle of knob, in the position you would normally run in the field (see **fig (a)**).

Step #2: slide a board or piece of flat iron under the double disc openers and back under the press wheel tire. The board or flat iron represents the bottom of the seed V.

Step #3: now you can bolt the Rebounder to the bracket on the drill. Using the 1/4" bolts attach the Rebounder to the bracket on the drill.

Step #4: variances in the disc blade size will occur among individual drills as well as within any single drill. Measure discs behind the tire track rows. If they are worn more than other rows this process may need to be used to set these rows also.

Step #5: if replacing Rebounders on previously installed brackets, simply remove the old Rebounder without removing the disc blade. Using a small bar magnet or a long handled magnet, place the bolt on the magnet and slide it up between the discs and into the holes of the bracket and the Rebounder. This allows you to come in behind with a wrench or socket to install and tighten the nuts.

