REBOUNDER™ MOUNTING INSTRUCTIONS

John Deere 750/1560/1590/1690/1860/1890/1990 Drills

(Read Instructions Completely before Beginning Installation)

Before working on your planter or drill


DANGER: When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder. **WARNING:** Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

Rebounder Mounting Instructions

Before you begin, verify all items listed in the "package contents" table at the right.

- Step #1: Remove the 1/4" bolt and washer holding the seed flapper in place on the seed boot of the John Deere drill. Now you are ready to mount the Rebounder in the place where the John Deere seed flapper was.
- **Step #2:** Place the Rebounder in the bottom of the seed boot as shown below. Raise the press wheel and let it rest on the square collar. Place the 1/4 x 7/8" whiz bolt through the Rebounder and tighten it into place.

Rebounder Package Contents (per single row)	
Item Rebounder	Quantity 1 1

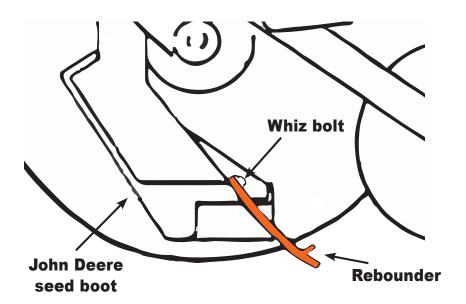



LIQUID FERTILIZER ATTACHMENT OPTIONS


John Deere 750-1990 Drills

Before working on your drill

DANGER: When storing or working on your drill, always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder. **WARNING:** Do not roll back or back up with the drill in or on the ground as this can result in damage to the Rebounder.

Option #1

Liquid fertilizer tube inside the single piece seed boot (NOTE: Must order special tube for JD 750 Drills.)

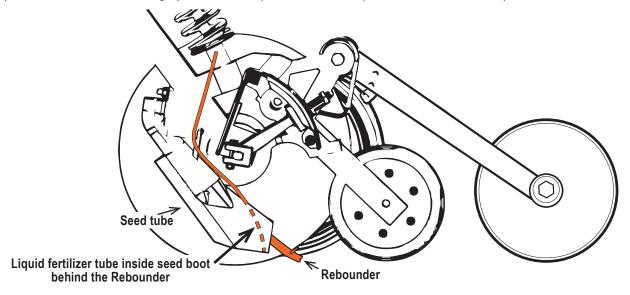

Option #2

Liquid fertilizer tube over 9" press wheel

