

# 4 LINK CLOSER™ MOUNTING INSTRUCTIONS

Kinze 2000-4000 John Deere 7000 7100 EARLY 7200 & Yetter Planters

Before working on your planter or drill

**DANGER:** When storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.

**PLEASE:** Read instructions completely and verify all package contents before beginning installation



**NOTE:** The spring eye bolt has intentionally been left loose from the factory. **Install this bolt to the OPPOSITE side of the front G2/G3 arm.** This will prevent the G2/G3 arm bracket from hitting the eye bolt.



### 4 Link Closer for Kinze older JD Yetter Package Contents (per single row)

Item	Quantity
4 Link Closer (complete assembly) . . . . .	1
Mounting Bracket . . . . .	1
7/16" x 2" Bolt . . . . .	1
7/16" Whiz Nut . . . . .	1
1/2" x 1-1/2" Carriage Bolt . . . . .	4
1/2" Whiz Nut . . . . .	4
Instruction Sheet . . . . .	1

**STEP #1:** Remove bolts from existing tail section. Remove spring and drop off the old tail section.

**STEP #2:** Place mounting bracket as shown in images below, and hold in place with carriage bolts and whiz nuts on each side (tighten later). Do not re-use the stop plates.



**STEP #3:** Install 7/16" bolt through the 4LC and old spring mount (tighten it later).  
If bolt will not fit, the hole will need to be reamed out slightly with a 7/16" drill bit.

**STEP #4:** Swing 4LC up and install carriage bolts from bottom of 4LC through the slotted holes and shoulder mount brackets. Retain with whiz nuts.

**STEP #5:** **Align 4LC with row units and double tighten carriage bolts and whiz nuts down so they don't come loose while running in the field.**

**STEP #6:** **Tighten all mounting hardware 2X**

Kinze row unit

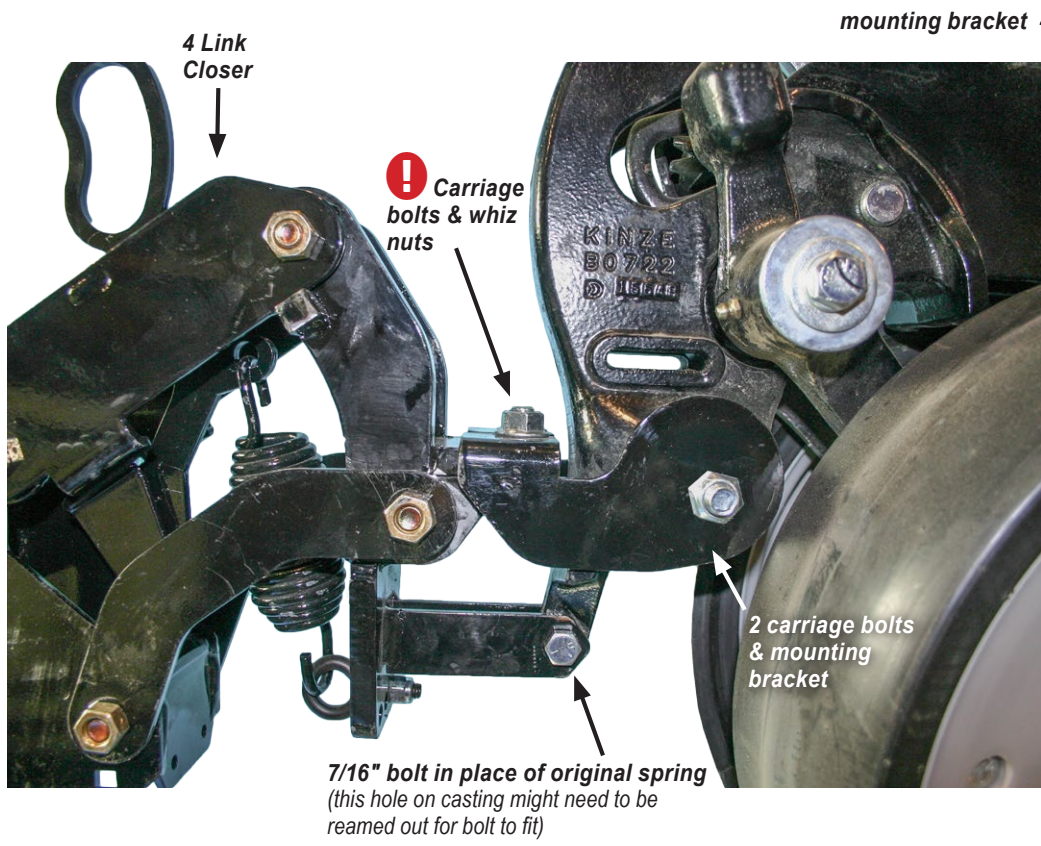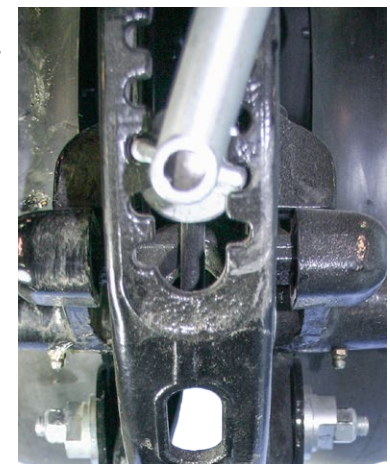

mounting bracket

4 Link Closer