

# 4 LINK CLOSER™ MOUNTING INSTRUCTIONS

## White 9000 Planters

Before working on your planter or drill


**DANGER:** When storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.

**PLEASE:** Read instructions completely and verify all package contents before beginning installation

### SPRING EYE BOLT 3-HOLE PLACEMENT



**NOTE:** The spring eye bolt has intentionally been left loose from the factory. **Install this bolt to the OPPOSITE side of the front closing wheel on the G2/G3/G4 arm.** This will prevent the G2/G3/G4 arm bracket from hitting the eye bolt.

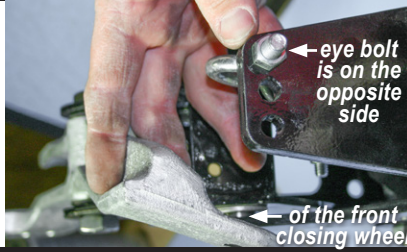

### 4 Link Closer for White 9000 Planters Package Contents (per single row)

Item	Quantity
4 Link Closer (complete assembly) . . . .	1
Instruction Sheet . . . . .	1

**#1:** Remove the press tire and tail section assembly: Loose and remove the vertical bolts holding tail section mount and spring assembly to row unit. **SAVE BOLTS!**

**#2:** Using these bolts, install 4LC on bottom of row unit where the mount was removed. Align with row unit and tighten bolts.

