

PRESS WHEEL SCRAPER MOUNTING INSTRUCTIONS

Spring Wire for CaseIH Planters


Before working on your planter or drill

DANGER: When storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.

PLEASE: Read instructions completely and verify all package contents before beginning installation.

Press Wheel Scraper Package Contents

Item	Quantity
Bracket.....	1
5/8" x 1" Bolt	1
5/8" Whiz Nut	1
3/8" x 1" Carriage Bolt.....	1
3/8" Nut	1
Spring Tine.....	1

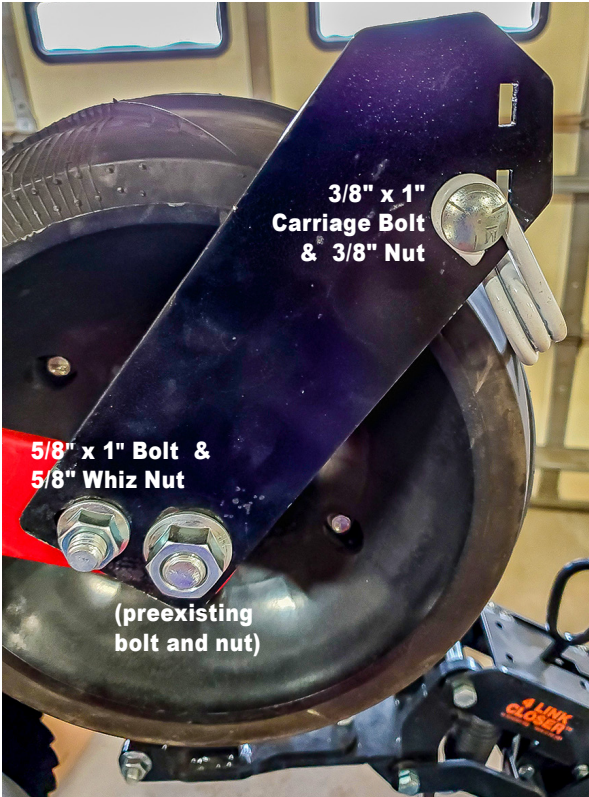

**This scraper was designed to mount on the left hand side of the planter row unit when facing back of unit looking forward.*



STEP 1

Remove existing nut from bolt holding press tire on the planter and place the black bracket in between nut and red iron of press tire frame.

STEP 2

Put 5/8" x 1" bolt (supplied) in front hole of black bracket through preexisting hole in red iron frame. Hold in place with 5/8" whiz nut. Tighten both bolts. [Photo 1]

STEP 3

Take 3/8" x 1" carriage bolt through spring [Photo 2], then through the black bracket. Set spring to gently rub tire & tighten bolt in place with 3/8" nut.

(Make sure tine is not too tight against press tire that the pressure keeps it from turning. Little to no pressure is all that is required.)

