

# MOHAWK / ZIPPER TROUBLESHOOTING


## Original (Plastic) & Cast Wheels : Setting the Wheel Distance

**THIS IS AN ADDENDUM TO YOUR CLOSING WHEELS MOUNTING INSTRUCTIONS**


### POINT OF MEASUREMENT

- Q:** *At what point on the closing wheels should I measure in-between in order to achieve the recommended 2" (2"-2.25") distance between the two wheels?*
- A:** *Measure from the **bottom edge of the round cast ring—minus the fingers—at its lowest point.** Or in other words, measure from where the tooth is molded in (on the inside).*

**Mohawk/Zipper with plastic hubs & Mohawk/Zipper Rings** part #: **MO MOR MOML/R SMOR ZPL/R ZRL/R ZPLM/RM**

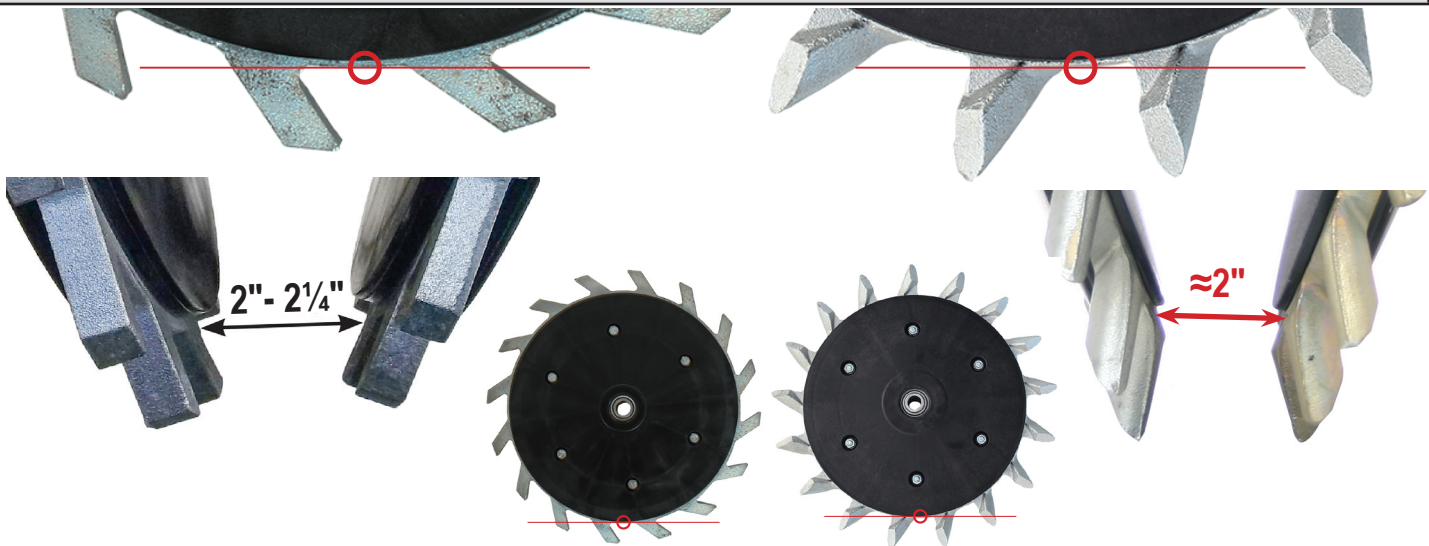

**Cast Mohawk/Zipper** part #: **CMO ZCL/R**

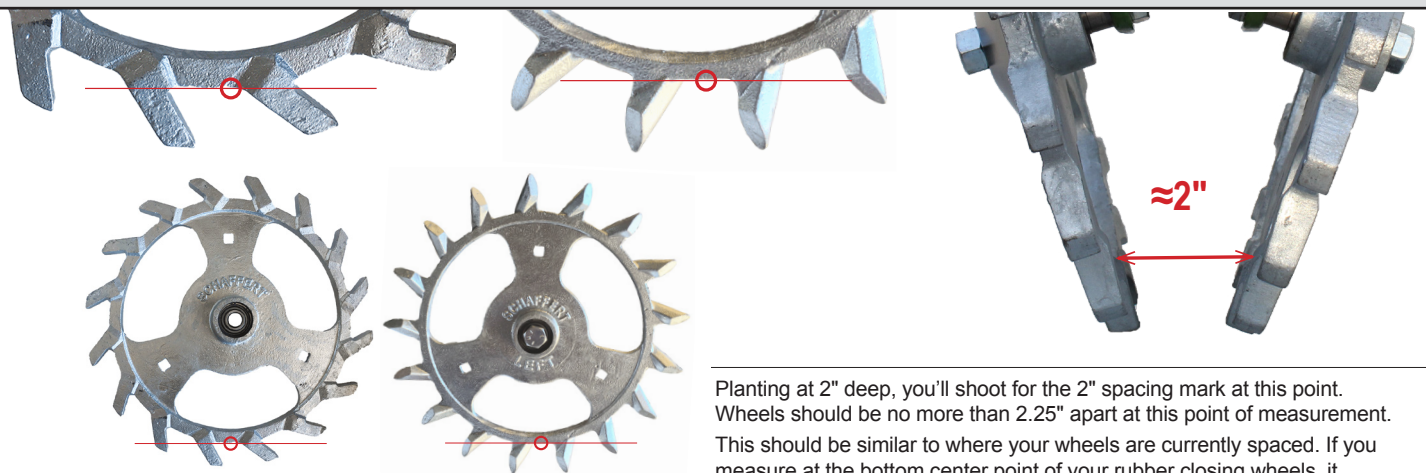

Planting at 2" deep, you'll shoot for the 2" spacing mark at this point. Wheels should be no more than 2.25" apart at this point of measurement. This should be similar to where your wheels are currently spaced. If you measure at the bottom center point of your rubber closing wheels, it should be approximately the same spacing as where you set these.

**NOTE:** The recommended distance between the Max closing wheels is less, or narrower, than the recommended distance between the all-cast or original plastic hub wheels. This is because the Max wheels have a wider profile.

If you are using one Max wheel and one other wheel, make sure you **follow the appropriate recommended wheel settings for each individual side or wheel.**

**OVER** →

# MOHAWK / ZIPPER TROUBLESHOOTING

## Original (Plastic) & Cast Wheels : Setting the Wheel Distance

### STAGGERED & OFFSET WHEELS

**Q:** How do I measure 2" (2"-2.25") distance between the wheels when my wheels are staggered or offset?



**A:** Lay a flat iron, ruler, or other similar object parallel through the middle of your closing wheels. Measure the width of your flat iron. Then split the difference between it and 2" to figure out how far away from the flat iron each wheel should be.

**EXAMPLE:**

Our flat iron is 1.5" wide.

$$2 - 1.5 = 0.5 \rightarrow 0.5 / 2 = 0.25" \text{ or } 1/4"$$

Measure 1/4" away from the flat iron on each side and make sure our wheel is at least that far away, but no more than 3/8" away, from the flat iron at the wheel's point of measurement.

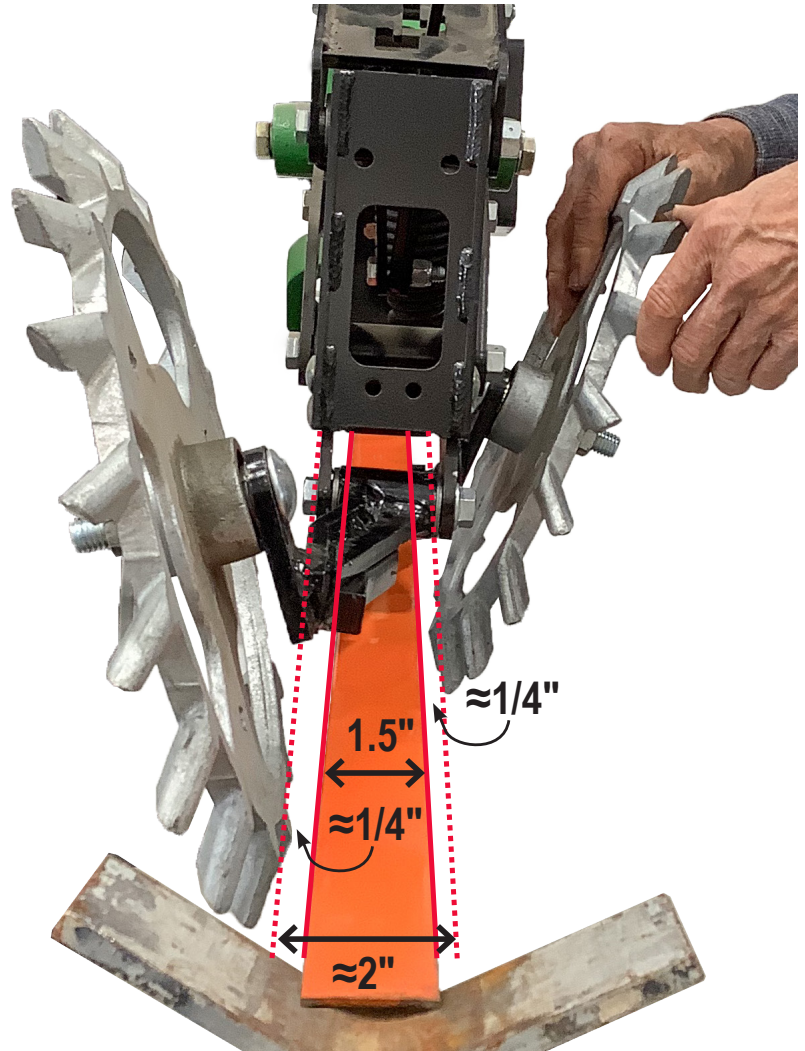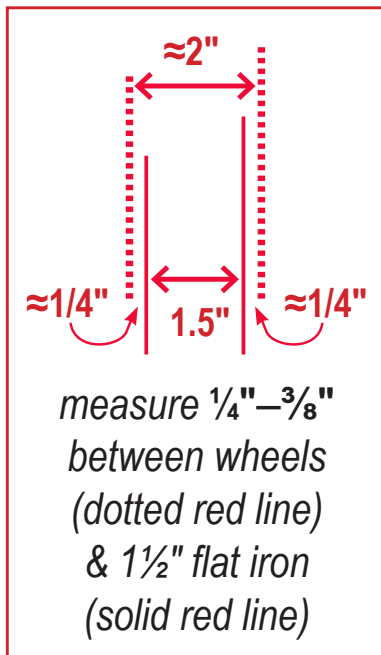

Planting at 2" deep, you'll shoot for the 2" spacing mark at this point. This should be similar to where your wheels are currently spaced. If you measure at the bottom center point of your rubber closing wheels, it should be approximately the same spacing as where you set these.

**EXAMPLE :** OUR FLAT IRON IS 1.5" WIDE

DESIRED WIDTH/DISTANCE BETWEEN TWO WHEELS*	2.0"
[MINUS] WIDTH OF FLAT IRON	- 1.5"
[EQUALS] DISTANCE REQUIRED BETWEEN THE FLAT IRON & WHEELS*	0.5"
DISTANCE REQUIRED BETWEEN THE FLAT IRON & WHEELS*	0.5"
[DIVIDED BY] TWO SIDES/WHEELS	÷ 2
[EQUALS] DISTANCE BETWEEN WHEEL* & FLAT IRON ON EACH SIDE	0.25"
[EQUALS]	= 1/4"

\*MEASURED FROM WHEELS' POINT OF MEASUREMENT, SEE OTHER SIDE