

DOUBLE V ZIPPER WHEEL & CLOSING ARM MOUNTING INSTRUCTIONS

John Deere 1560 - 1990, ProSeries Drills & Air Seeders

Before working on your planter or drill

DANGER: When storing or working on your drill always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.

PLEASE: Read instructions completely and verify all package contents before beginning installation.


#1: Mounting the John Deere Press Wheel Arm Covers

The 2-piece John Deere Drill Closing Wheel Arm Cover encases the OEM arm.

Remove the original cast closing wheel and bolt.

Place one piece of the arm cover on either side of the OEM closing wheel arm. The piece with extra slotted holes should be on the same side as the closing wheel will be mounted.

Use the four 5/16" x 2" bolts and 5/16" whiz nuts to hold the two arm covers in place on either side of the OEM arm.

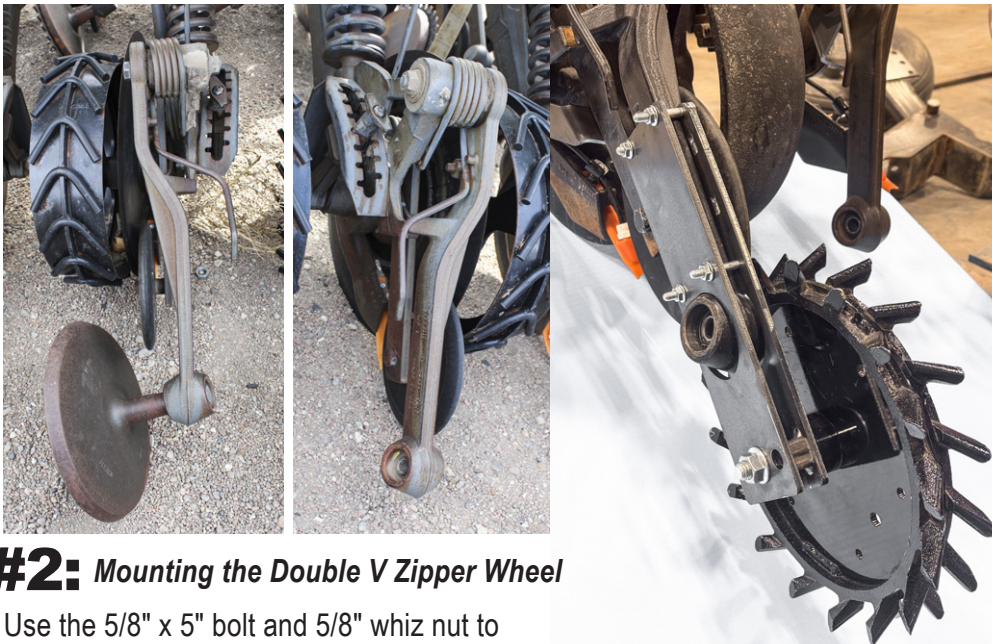

#2: Mounting the Double V Zipper Wheel


Use the 5/8" x 5" bolt and 5/8" whiz nut to install the Double V Zipper closing wheel to the upgraded arm.

We recommend using the Double V Zipper scraper. The scraper bracket is installed on this 5" bolt to the outside of the outside arm cover piece.

Use the 1/2" spacer between the Double V Zipper wheel and inside arm cover piece, to align the Double V Zipper wheel over the center of the furrow.

Make sure the Zipper wheel is installed so that the fingers point down in the back. In the front, the fingers will face forward to properly engage with the soil.

Secure wheel and scraper bracket in place with the 5/8" whiz nut.

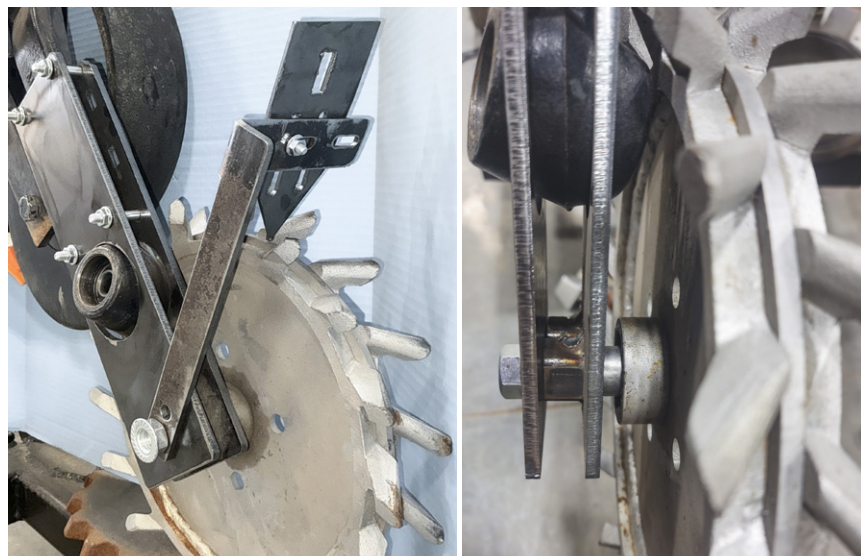

Double V Zipper	
Package Contents for part #: ZV	
Qty	Item
1	Double V Zipper Wheel
JD Drill Closing Wheel Arm Cover	
Package Contents for part #: CWACJD	
Qty	Item
2	Arm Cover Pieces
4	5/16" x 2" Bolt
4	5/16" Whiz Nut
1	5/8" x 5" Bolt
1	5/8" Whiz Nut
1	1/2" Spacer
1	Instruction Sheet
SOLD SEPARATELY	
Double V Zipper Scraper	
Package Contents for part #: ZVS	
Qty	Item
1	Scraper Arm
1	Scraper Part
2	1/4" x 1-1/4" Carriage Bolt
2	1/4" Whiz Nut
SOLD SEPARATELY	
JD Drill Closing Wheel Stop	
Package Contents for part #: JD/STN	
Qty	Item
1	Closing Wheel Stop (L or R)


OVER →

DOUBLE V ZIPPER WHEEL & CLOSING ARM MOUNTING INSTRUCTIONS

John Deere 1560 - 1990, ProSeries Drills & Air Seeders

Mounting the Double V Zipper

Use a 1-1/2" wide flat iron or yardstick to ensure the Double V Zipper wheel is centered directly over the furrow.

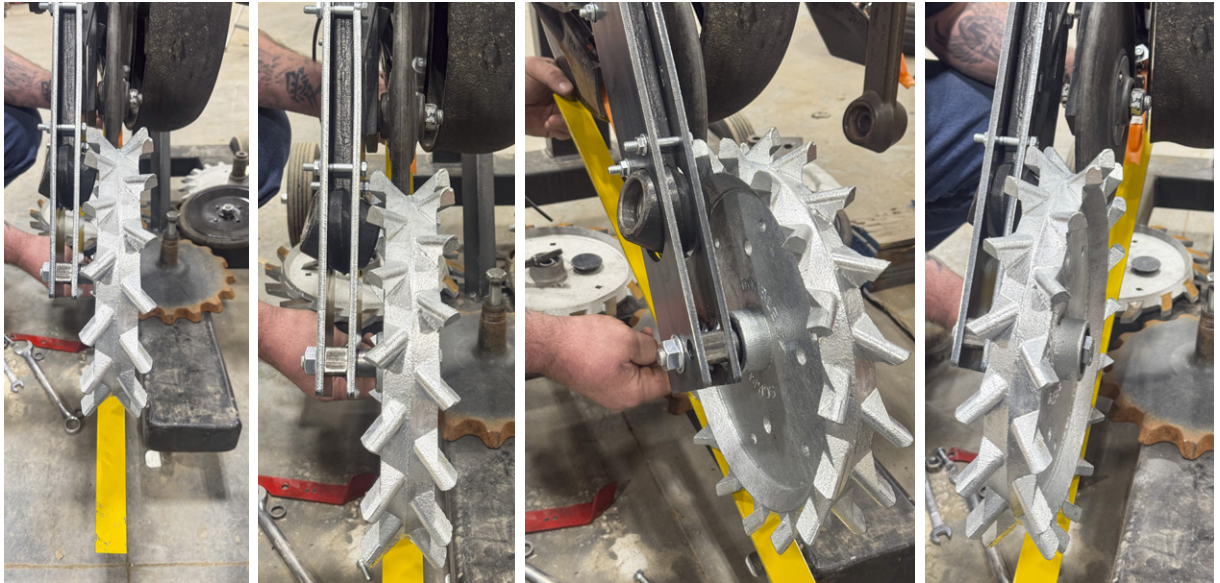

#3: Mounting the Wheel Scraper

Use the two 1/4" x 1-1/4" carriage bolts and 1/4" whiz nuts to bolt the scraper part to the top of the scraper arm.


Adjust the scraper part in and out and up and down so that it is centered directly over the center of the Double V Zipper Wheel.

Tighten nuts.



#4: Mounting the Closing Wheel Stop

Using the original bolt, install the JDSTN closing wheel stop so that it rests under the closing wheel as shown. This stop will prevent the Double V Zipper from hitting or resting on the press wheel during transport.

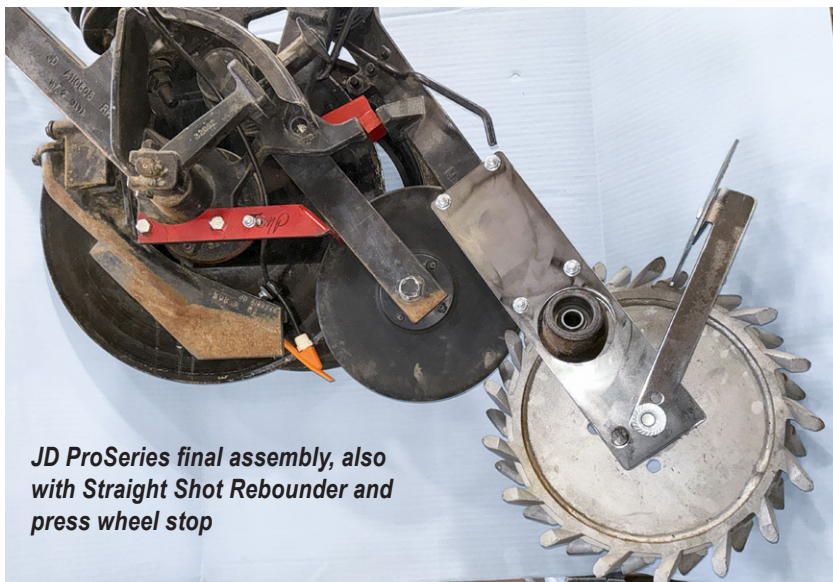

JD ProSeries final assembly, also with Straight Shot Rebounder and press wheel stop

