

# REBOUNDER® MOUNTING INSTRUCTIONS

## Replacement for Quick Attach Seed Firmers

Before working on your planter or drill

**DANGER:** When storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the attachments.

**PLEASE:** Read instructions completely and verify all package contents before beginning installation

**NOTE:** Rebounder and bracket designed to replace the consumable parts of the Quick Attach seed firmer assembly, allowing for repair of worn-out or poorly functioning seed firmer assemblies

### Rebounder Package Contents (per single row)

Item	Quantity
Rebounder (3 hole) .....	1
T Nut.....	2
T Nut Screw .....	2
Washer .....	2
Instruction Sheet .....	1

### Bracket Package Contents (per single row)

Item	Quantity
Mounting Bracket. ....	1

**#1:** If applying liquids in furrow with the Rebounder, attach either Y-Not Split It, Hose Holder, or Straight Shot kit by following kit directions.

**INSTALL KIT BEFORE INSTALLING REBOUNDER TO PLANTER UNIT.**

**#2:** Use the two t-nuts, t-nut screws, and washers to bolt the Rebounder to the back of the mounting bracket.

The t-nuts and washers will go through the 3rd (from the top) and bottom (5th) holes of the mounting bracket and the top and middle holes of the Rebounder.


Secure t-nuts with the two t-nut screws on the under side of the Rebounder.

**NOTE:** The unused holes are not for adjusting the Rebounder up and down. Once the Rebounder is mounted, you are set to go—no adjustments needed.

t-nuts go  
through washers  
then 3rd and 5th  
(bottom) hole  
on mounting  
bracket




t-nuts go through  
top and middle hole  
on Rebounder

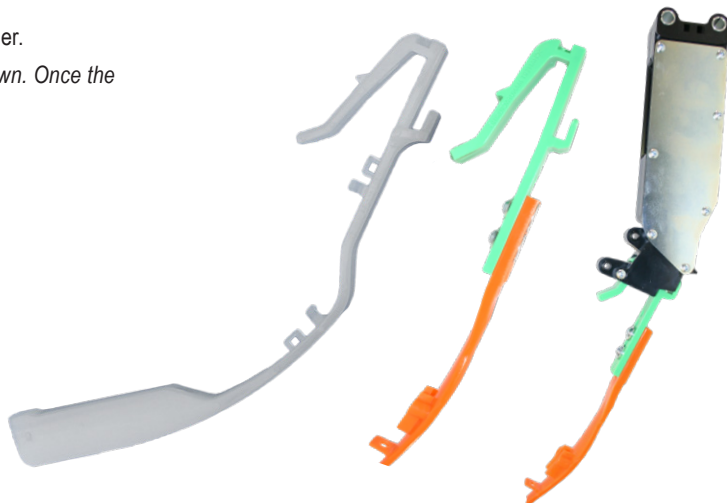

**#3:** Un-clip the old seed firmer from the Quick Attach housing. Clip the replacement Rebounder and bracket into its place.

The seed firmer  
clips in over this  
notch

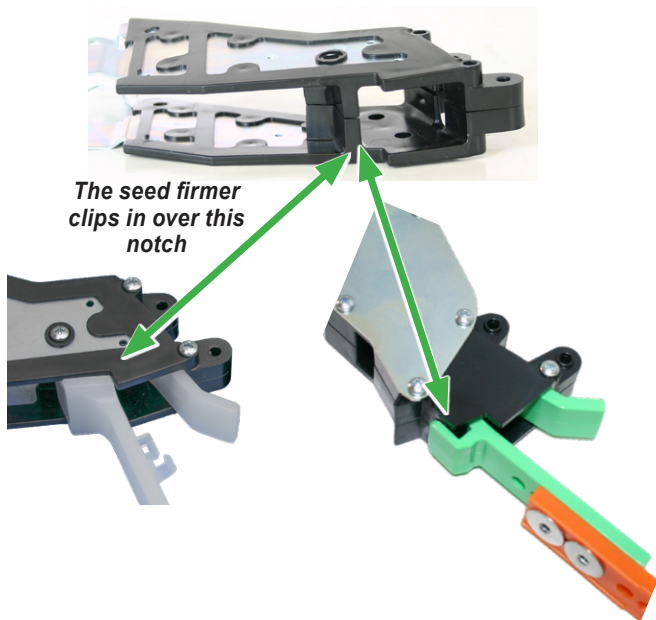

**Final Assembly**